

Specification

Fiche

Label

Product Specification

INVACYL

Product Code: TRBMVI-0180LFB

Item Description: 180L INVACYL IND STD

C




Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
180 L	INVACYL	IndirectUnvented	Stainless	INVACYL	INDIRECT

Product Specification

Actual capacity (Ltr)	180	Thermal insulation	DENSE PU FOAM
Unit weight empty (kg)	42	Cylinder material	LDX 2101
Unit weight full (kg)	218	Outer casing	COATED MILD STEEL
No immersions	1	Coil material	316L STAINLESS STEEL
Immersion spec	3KW@230V	Foam thickness	0
Max mains water pressure (Bar)	10	Operating temp (C)	60
Operating pressure (Bar)	7	Safety valve temp (C)	95
Tested to standard	BS EN 12897:2006	No heat exchangers	1
Heat loss	1.82	Coil 1 rating (kW)	11.54
Coil 1 surface area (m ²)	.67	Coil 1 max prim pressure (Bar)	3.5
Coil 1 resistance (Bar)	.2		

Dimensions

A - Height (mm)	1296
B - Diameter (mm)	550
C (mm)	195
D (mm)	495
E (mm)	605
F (mm)	705
H (mm)	1083

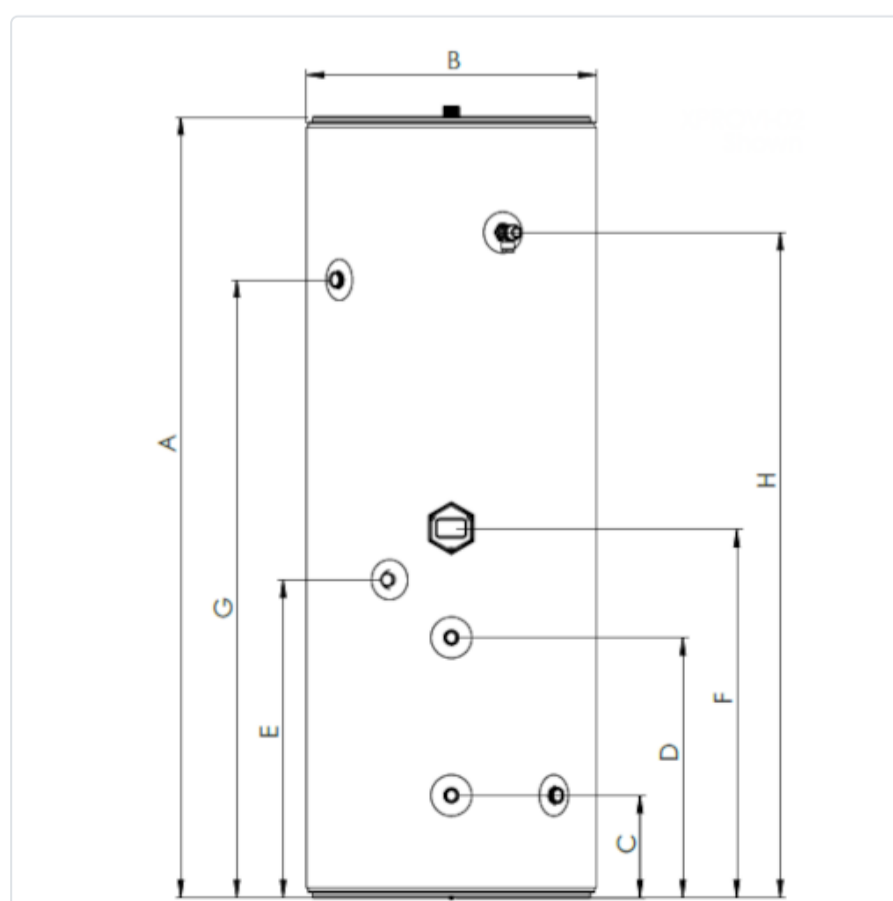

[Click or scan here to view the product page:](#)

[https://erpfichetool.jouleiot.com/#/specification/Joule UK/TRBMVI-0180LFB](https://erpfichetool.jouleiot.com/#/specification/Joule%20UK/TRBMVI-0180LFB)



<https://jouleuk.co.uk/products/joule-invacyl-indirect/>



Test Standard: BS EN 12897:2006

Joule UK

4 Valencia Park, Gilcar Way,
Wakefield Europort
Castleford, West Yorkshire
WF105QS, UK

Joule Ireland

Unit 407 NW Business Park,
Cappagh Road, Ballycoolin,
Blanchardstown,
Dublin